



Heat resistant cable ties

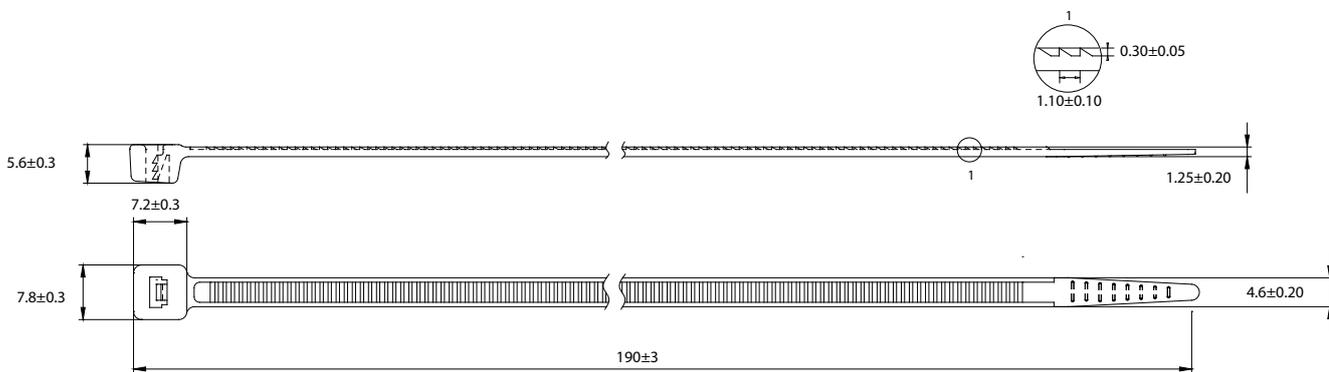

3.2

1. MATERIAL Natural: Polyamide 6.6 heat stabilised natural
2. MATERIAL Black: Polyamide 6.6 heat stabilised Black
3. Flammability of raw material : UL 94 - V2
4. Humidity absorption: 2,7% - 2,8% (23° C - 50% R.H.)
5. Installation temperature: -10° C ÷ +115° C
6. Working temperature: -40° C ÷ +115° C
7. Max sustainable temperature for short time: +110° C
8. Good resistance to bases, oils, greases, oil derivatives, chloride solvents. Limited resistance to acids. Not resistant to phenols.
9. Carbon black addition gives a better UV resistance
10. comply with UL62275

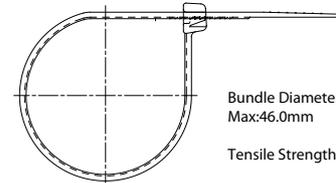

Bundle Diameter:
Max:46.0mm

Tensile Strength: 23kgs (50lbs)

