kortpack

De groothandel in verpakkingsmaterialen

Extreme weather resistant cable ties PA12

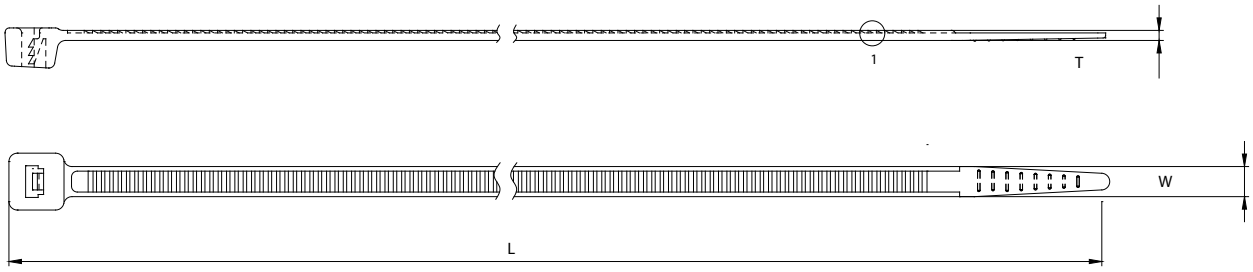





L	W	T	d	D	Strength
100	2.5	1.0	3.0	20.5	8 kgs
150	3.6	1.1	3.5	36.0	18 kgs
200	3.6	1.2	3.5	52.5	18 kgs
200	4.8	1.2	3.5	49.5	23 kgs
300	4.8	1.3	3.5	81.0	23 kgs
370	4.8	1.3	3.5	102.0	23 kgs
370	7.6	1.5	8.5	103.5	54 kgs

Advantages
- The standard for PA12 cable ties is over 3600 hours of UV exposure continually in a UV chamber.
- The UV strength is equivalent to about 24 years of weather resistance (long lifespan)
- Highly resistant to chemicals such as chlorides, suitable for solar galvanized steel installation.
- Excellent performance in challenging environments such as offshore, oil rigs, melting snow and freezing cold areas.

1. Material: Polyamide 12
2. Flammability of raw material : UL 94 - HB
3. Humidity absorption: <1.0% (23° C - 50% R.H.)
4. Installation temperature: -30° C ÷ +85° C
5. Working temperature: -40° C ÷ +85° C
6. Max sustainable temperature for short time: +110°C
7. Excellent resist to Salt Damage, Chemicals, Impact

Tolerance unspecified
mm (inch)
X.XXX ±0.1 (0.004)
X.XX ±0.25 (0.010)
X.X ±0.5 (0.02)
X. ±1.0 (0.04)
ANGULAR ± 2

Schelluinsestraat 70
4203 NN Gorinchem
The Netherlands
+31 (0)184 614 256
+31 (0)184 614 881
info@kortpack.nl
www.kortpack.nl

Rabobank : 1332.51.632
Iban nummer : NL83RABO0133251632
Swift code : RABONL2U
BTW nummer : NL8235.41.216 B01
KVK nummer : 54204259

Dit briefpapier is 100% milieuvriendelijk geproduceerd.

Leverings- en betalingscondities overeenkomstig de algemene voorwaarden. Afgedrukt op de achterzijde van dit briefpapier. Tevens kostenloos opvraagbaar.